

RECON


In This DIY I Will Explain How To Replace The H3 Bulb In **RECON: Backup Projectors**

Tools Required: Medium – Small, Sized Phillips Screwdriver


What You Need To Get: New H# 55W Bulb

You Will First Need To Remove The Two Phillips Screws On The Side of Your Recons. *NOTE The Order of The Washers. – Disconnect The Terminals.

- Place Your Projector On A Solid Surface To Work On
- Flip The Projector Upside Down – To Expose The Silver Access Plate

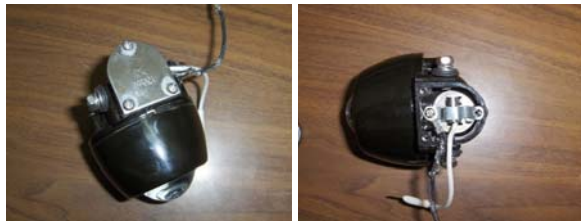

- Remove The 3 Phillips Screws To Remove The Access Plate – Set Aside.
- Examine How The Bulb Is Installed From The Factory
- Remove The Screw Holding The Ground Terminal & The Bulb Keeper – Set Aside

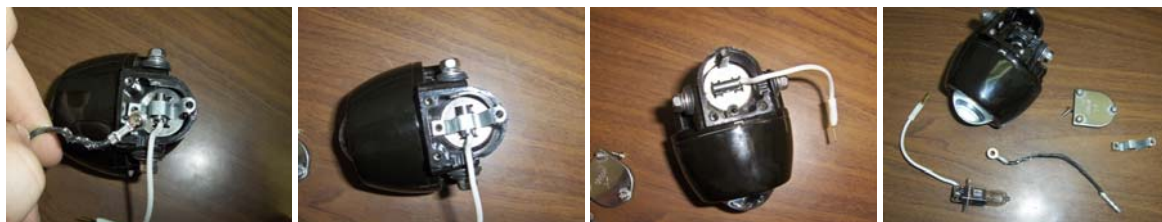

- Remove The Bad Bulb, Wiggle Back And Fourth Until Bulb Separates From The Housing
- Install The New Bulb
- Reassemble Following Tear Down Procedure.
- The Ground and Power Wire Have Channels To Lay In
- Be Sure The Cover Plate and Gasket Have A Good Seal, Be Sure Not To Over Tighten.

Visit Us Online at: www.GoRECON.com