

DU-HA[®]

DOWN UNDER-HOLDING APPARATUS

11 Color: Gray P/N // 20096
 09-11 Color: Black P/N // 20071
 09-11 Color: Tan P/N // 20073
 09-10 Color: Gray P/N // 20072

Installation Instructions for 09-11 Ford F-150 Supercab Underseat Storage

Materials Needed:

- // 10mm socket

Installation Instructions:

- 1 Flip up rear seats.
- 2 Remove the jack from underneath the back seat and remove the bracket that holds the jack in place using a 10mm socket.
- 3 Slide driver's side end of DU-HA against seat bracket. Snap other side of DU-HA around passenger's side seat bracket. (You may have to bend side inward to snap into position.)
- 4 Secure the DU-HA to the floor of the truck using one of the existing bolts (one that was originally used to secure the jack bracket) using a 10mm socket.
Please note: If the existing bolt is not long enough to secure the DU-HA to the floor (due to the rubber floor mats under the seat), use the included bolt and washer instead.
- 5 Secure the passenger's side using the provided strap. Thread the strap through the slot in the back of the DU-HA and around the seat bracket (as pictured).
- 6 Install organizers/gun rack by sliding them into slots in the DU-HA (as pictured below).
- 7 Place jack and jack handles inside the DU-HA. You can also place the jack underneath the truck on top of the spare tire (see below for more information).

Safety Instructions:



Warning: Seat must be down and latched at all times while vehicle is moving. Make sure DU-HA is secured in vehicle according to installation instructions. Do not store explosives or hazardous materials in the DU-HA. Do not place loaded guns in the DU-HA.

For further instructions refer to truck owners manual or contact DU-HA, Inc.



Helpful Hint:
 The jack can also be stored underneath the truck, on top of the spare tire, to free up space in the DU-HA.

First wrap the jack in a plastic bag or cloth, to keep it from getting dirty. Then, lower the spare tire (per instructions on jack tools) from under the truck and set the jack on top, as pictured. When finished, reel tire back up.

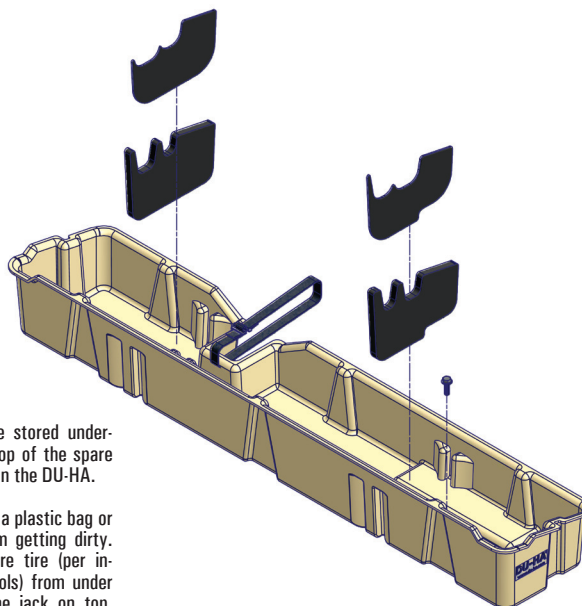

Ribs on buckle should face up. Thread strap through buckle as shown.



This is how the DU-HA should look installed under the back seat.