



Accessories

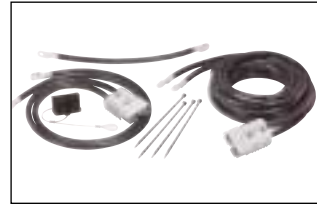

2209 Trailer Wiring Kit
Fits EP and EPi Series Winches

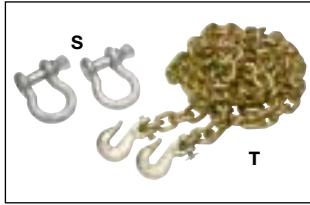

S 2538 Bow Shackles (Pair)
T 2541 Chain With Grab Hooks;
Chain is 3/8" x 10'
(9.5mm x 3.04m)



2236 Quick Connect
2 - 4 AWG wire



Accessory Kit

Kit 2224

- Nylon Carry Bag
- Heavy Duty Leather Palmed Gloves
- Heavy Duty Pulley Block 20,000 lb. (9072kg)
- Nylon Sling
- 2 Bow Shackles




Recovery Straps

- 2517** 2"x20' 20,000 lb. (9072kg)
(50.8mm x 6.09m)
- 2518** 2"x30' 20,000 lb. (9072kg)
(50.8mm x 9.14m)


Tree Trunk Savers

- 1509** 2"x6' 20,000 lb. (9072kg)
(50.8mm x 1.82m)
- 2531** 3"x8' 30,000 lb. (13,608kg)
(76.2mm x 2.43m)

EP6.0/9.0 Dimensions

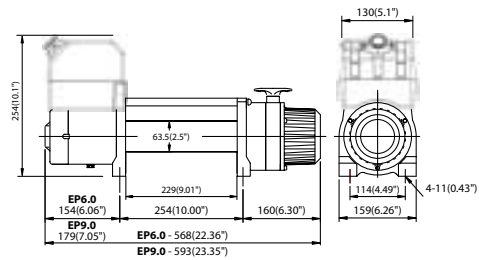

EPi6.0/9.0 Dimensions

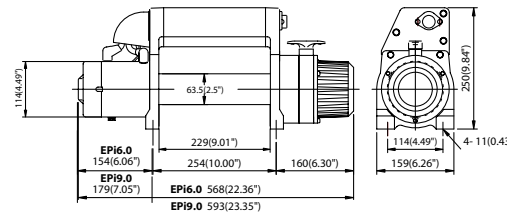

Distributed By:



Superwinch, Inc.
Winch Drive
Putnam, Connecticut 06260, USA
Customer Service: 1.860.928.7787
FAX: 1.860.963.0811
e-mail: info@superwinch.com

Superwinch, Ltd.
Abbey Rise, Whitchurch Road
Tavistock, Devon PL19 9DR, England
Customer Service: +44 (0) 1822 614101
FAX: +44 (0) 1822 615204



www.superwinch.com

Design, materials and specifications are subject to change without notice. Superwinch is not responsible for printing errors inadvertently made in the production of this catalog.

00403 Printed in USA 10M 05/04 LG


HIGH PERFORMANCE RECOVERY WINCHES

New EP Series



Complete. Finally, winches that strike the perfect balance between performance and value...introducing the NEW Superwinch EP Series of 6,000 (2722kg) and 9,000 (4082kg) pound capacity winches. Available in both integrated and non-integrated solenoid configurations, EP Series winches includes all the features you want: efficient three-stage planetary gearbox, power IN and OUT, freespooling drum, automatic load-holding brake, sealed switching solenoid, as well as a roller fairlead and pulley block. And they're all backed by Superwinch's legendary service.

EP Series Standard Features

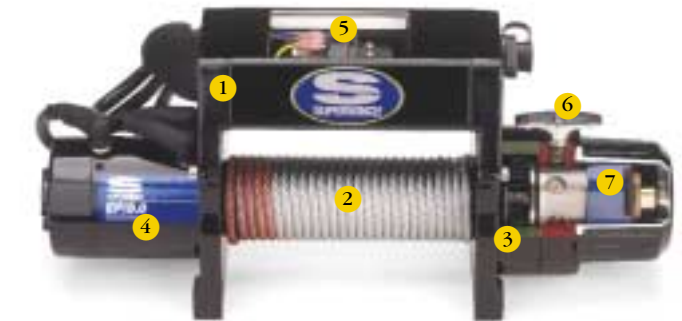

- | | |
|--|---|
| 1 Weather-resistant baked powder-coat finish | 4 Powerful series-wound motor |
| 2 125 feet (38.1m) wire rope (EPI)
100 feet (30.5m) wire rope (EP) | 5 Integral sealed switching solenoid |
| 3 Low noise 3-stage planetary gear box | 6 Freespooling clutch |
| | 7 Automatic 100% load brake |

POWER WHEN YOU NEED IT, WHERE YOU NEED IT.

EP6.0/9.0 and EPi6.0/9.0 Series Winches

PERFORMANCE EP9.0/EPi9.0 (1st layer on drum)

Line Pull lbs./kg	Line Speed FPM (m/m)	Motor 12V Amps	Motor 24V Amps
0	47.1 (14.3)	33	15
2,000 (907)	14.0 (4.6)	110	55
4,000 (1814)	11.0 (3.4)	200	100
6,000 (2722)	9.0 (2.7)	230	115
8,000 (3629)	7.5 (2.3)	260	130
9,000 (4082)	6.4 (2.0)	350	210

PERFORMANCE EP6.0/EPi6.0 (1st layer on drum)

Line Pull lbs./kg	Line Speed FPM (m/m)	Motor 12V Amps	Motor 24V Amps
0	58.9 (17.8)	40	24
2,000 (907)	23.0 (7.0)	170	102
4,000 (1814)	13.0 (4.0)	350	210
6,000 (2722)	10.0 (3.1)	440	264

All ratings are for first (bottom) layer of wire rope.

EP6.0/9.0 and EPi6.0/9.0 Product Specifications

	EP/EPi6.0	EP/EPi9.0
Rated Line Pull	6,000 lb. (2722 kg)	9,000 lb. (4082 kg)
Motor	12VDC 3.6 hp, 90° Rotatable, series wound 24VDC 2.0 hp, 90° Rotatable, series wound	12VDC 4.6 hp, 90° Rotatable, series wound 24VDC 2.6 hp, 90° Rotatable, series wound
Gearing	3-Stage Planetary	3-Stage Planetary
Gear Ratio	156:1	156:1
Braking	Automatic 100% Load Holding	Automatic 100% Load Holding
Control	15' (4.6m) Handheld Remote	15' (4.6m) Handheld Remote
Wire Rope	EP6.0: 21/64" x 100' (8.3mm x 30.5m) EPi6.0: 21/64" x 125' (8.3mm x 38.1m)	EP9.0: 21/64" x 100' (8.3mm x 30.5m) EPi9.0: 21/64" x 125' (8.3mm x 38.1m)
Dimensions	EP6.0: 22.36"l. x 6.26d. x 7.13h. (568mm x 159mm x 181mm) EPi6.0: 22.36"l. x 6.26d. x 9.84h. (568mm x 159mm x 250mm)	EP9.0: 23.35"l. x 6.26d. x 7.13h. (593mm x 159mm x 181mm) EPi9.0: 23.35"l. x 6.26d. x 9.84h. (593mm x 159mm x 250mm)
Drum Diameter	2.5" (63.5mm)	2.5" (63.5mm)
Drum Length	9" (228.6mm)	9" (228.6mm)
Weight	EP6.0: 90 lb. (40.8kg) EPi6.0: 96 lb. (43.5kg)	EP9.0: 103 lb. (46.2kg) EPi9.0: 109 lb. (49.4kg)

All ratings are for first (bottom) layer of wire rope.

⚠ Winches are not intended for the transportation of people.



EP Series

EPi Series

EP6.0	12VDC, P/N 06032
EP6.0	24VDC, P/N 06033
EP9.0	12VDC, P/N 09032
EP9.0	24VDC, P/N 09033
EPi6.0	12VDC, P/N 06034
EPi6.0	24VDC, P/N 06035
EPi9.0	12VDC, P/N 09032
EPi9.0	24VDC, P/N 09035